





RADIAL FANS


RADIAL FAN DIRECTIONS

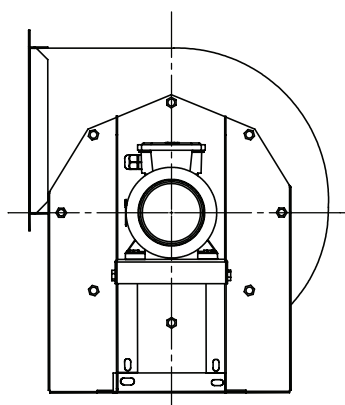


L180

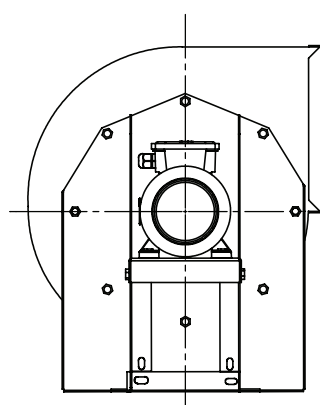


R180

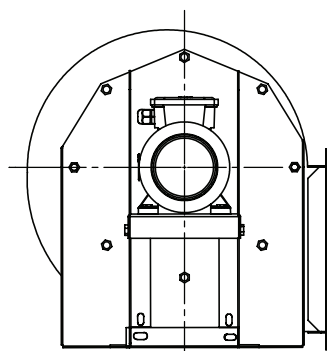


L270

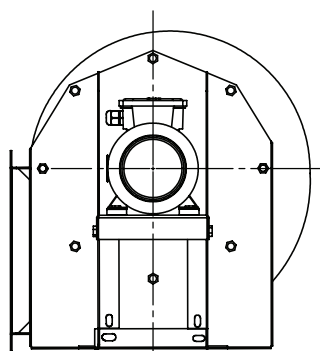

R270

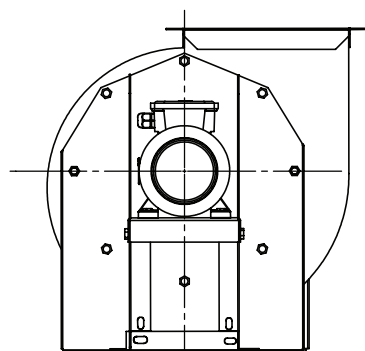

L090

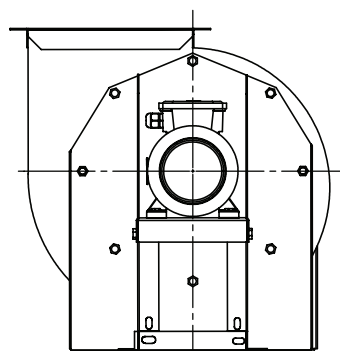

R090



RBAK

**SINGLE SUCTION
INDUSTRIAL RADIAL FANS SQUARE TYPE
(FORWARD CURVED)
SPARSE WING- LOW PRESSURE**

RBAK for low pressure systems. These fans designed for all kinds of facilities. They can be used in ventilation. Safe thanks to the square case system comfortably to the desired shooting position translatable. The most economical ventilation. It is one of the solutions.

MATERIAL

The assembly is electrostatic powder painted. It is made of DKP black sheet. Radial fan, forward curved sparse propeller structure made of DKP black sheet with.

SPEED CONTROL


Optional frequency can be provided with inverters.

USAGE AREAS




In ovens, various heating-undesirable low operating speeds electronic and similar equipment coolingused.

Type/Code	Electrical Motor				Max. Air Flow	Max. Pressure
	Voltage	Power		Speed		
	(V)	(HP)	(kW)	(d/d) (rpm)	m ³ / h	Pa
RBAK-0,50-T-4K	380	0,50	0,37	1.380	2.000	400
RBAK-1,00-T-4K	380	1,00	0,75	1.410	3.000	500
RBAK-1,50-T-4K	380	1,50	1,10	1.430	4.000	600
RBAK-2,00-T-4K	380	2,00	1,50	1.430	5.000	700
RBAK-3,00-T-4K	380	3,00	2,20	1.435	6.500	800
RBAK-4,00-T-4K	380	4,00	3,00	1.435	7.500	900
RBAK-5,50-T-4K	380	5,50	4,00	1.455	8.500	1.000
RBAK-7,50-T-4K	380	7,50	5,50	1.465	10.500	1.100
RBAK-10,0-T-4K	380	10,0	7,50	1.465	12.500	1.200

TECHNICAL DIMENSION

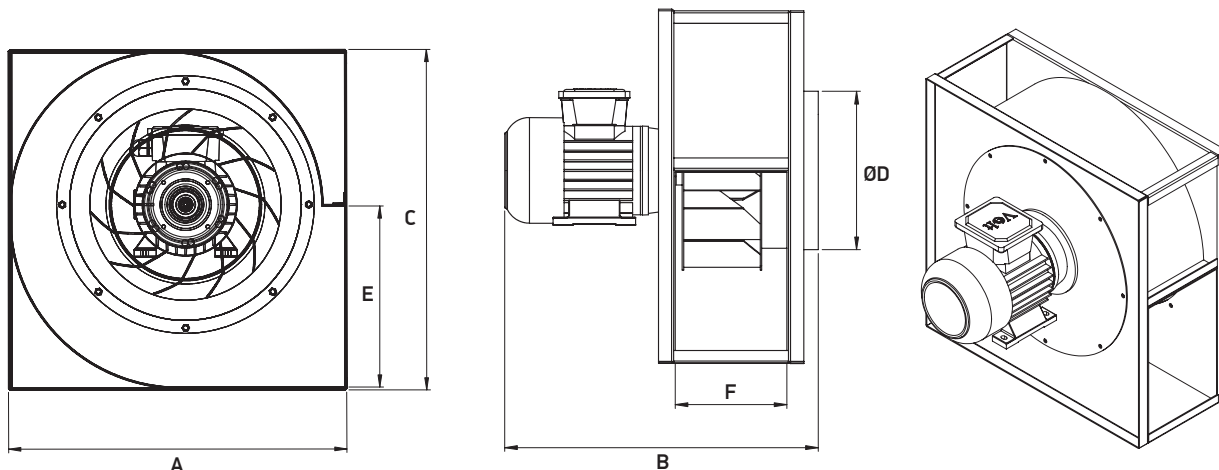

Type/Code	Sizes (mm)					
	A	B	C	D	E	F
RBAK-0,50-T-4K	470	470	460	Ø 200	250	150
RBAK-1,00-T-4K	520	520	545	Ø 200	255	185
RBAK-1,50-T-4K	566	566	580	Ø 246	270	205
RBAK-2,00-T-4K	619	619	620	Ø 260	290	225
RBAK-3,00-T-4K	660	660	670	Ø 300	315	240
RBAK-4,00-T-4K	681	681	731	Ø 350	370	250
RBAK-5,50-T-4K	755	755	767	Ø 390	400	270
RBAK-7,50-T-4K	794	794	825	Ø 450	460	330
RBAK-10,0-T-4K	876	876	932	Ø 450	545	380

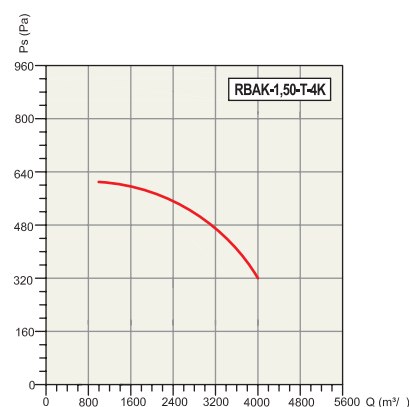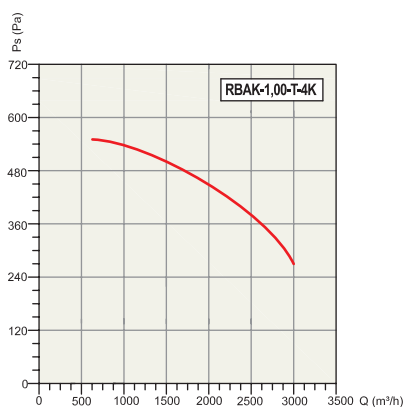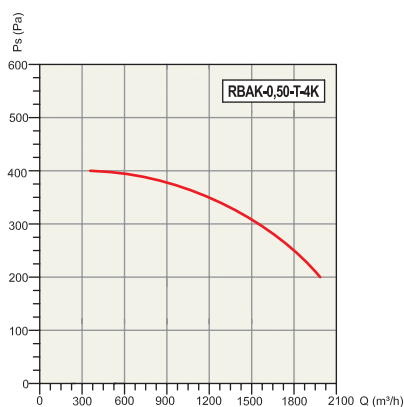

RADIAL FANS



TSEK

TSE

K-Q
TSE-800-EN
9000

CE

